


**Wall lamp
Ceiling lamp**


with LED, lightcolour warmwhite, 3000 K,
with integrated converter AC/DC,
resp. for fluorescent lamps TC-S
stainless steel
with mounting plate
opal glass





Art.-No.	Lamp	Luminous flux	EEI
with LED			
696303	1 x LED 16 W	1800 lm	A+
for fluorescent lamp			
696203	1 x TC-S 11 W	G23	A



**Wall lamp
Pedestal lamp
Bollard lamp**


for energy saving lamps (ESL) TC-DSE resp.
LED-Retrofit
stainless steel with mounting plate made of
cast aluminium
opal glass

- Recommended distance:
Bollard lamp 4 m
- Advice:
For use with these lamps we recommend the
LED-Retrofit, see p. 217, Art.-No. 90750309.

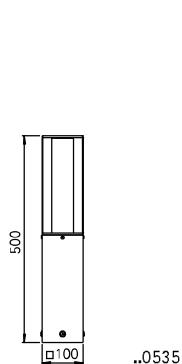

Art.-No.	Lamp	Lamp dimensions	Base	EEI
Wall lamp				
690335	1 x ESL / LED-Retrofit max. 20 W	max. ø 55 x 250 mm	E27	A++ to B
Pedestal lamp				
690535	1 x ESL / LED-Retrofit max. 20 W	max. ø 55 x 250 mm	E27	A++ to B
690010	appropriate sunk pedestal			
Bollard lamp				
692035	1 x ESL / LED-Retrofit max. 20 W	max. ø 55 x 250 mm	E27	A++ to B
690010	appropriate sunk pedestal			

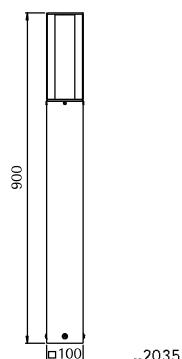




**Wall lamp
Pedestal lamp
Bollard lamp**




for energy saving lamps (ESL) resp. LED-Retrofit resp. fluorescent lamps TC-L ..0504, ..2090 with electronic ballast
stainless steel
with mounting plate made of cast aluminium
acrylic opal glass



..0202



..2090



..0504


Art.-No.	Lamp	Lamp dimensions	Base	EEI
Wall lamp				
690202	1 x ESL / LED-Retrofit max. 20 W	max. ø 55 x 250 mm	E27	A++ to B
Pedestal lamp				
690054	1 x TC-L 24 W		2G11	B
690010	appropriate sunk pedestal			
Bollard lamp				
692090	1 x TC-L 36 W		2G11	A
690010	appropriate sunk pedestal			




**Wall, Ceiling and
Pedestal lamp**
Lamp with spike



for energy saving lamps (ESL) resp. LED-Retrofit
stainless steel
with mounting plate resp.
spike with 2,5 m cable and plug
acrylic glass



..0200




..2126



Art.-No.	Lamp	Lamp dimensions	Base	EEI
Wall, Ceiling and Pedestal lamp				
690200	1 x ESL / LED-Retrofit	max. 15 W	max. ø 55 x 110 mm	E27 A++ to B
Lamp with spike				
692126	1 x ESL / LED-Retrofit	max. 15 W	max. ø 55 x 110 mm	E27 A++ to B





**Wall lamp
Ceiling lamp**


..6205

for incandescent lamps
stainless steel
with mounting plate made of
cast aluminium
opal glass

LED Available on request
with LED 10 W (770 lm,
3000 K, warmwhite) for power
supply 230 V, 50 Hz.

Art.-No.	Lamp	Base	EEI
696205	Wall and Ceiling lamp 1x QA 55 57 W	E27	A++ to E


**Wall lamp
Ceiling lamp**


..6200, 6300


with LED, lightcolour warmwhite,
3000 K, dimmable resp. for
fluorescent lamps TC-S
stainless steel
with mounting plate
opal glass

Art.-No.	Lamp	Luminous flux	EEI
696300	with LED 1x LED 16 W	1600 lm	A+

Art.-No.	Lamp	Base	EEI
696200	for fluorescent lamp 1x TC-S 11 W	G23	A


Wall lamp


for incandescent lamps
stainless steel
with mounting plate made of
cast aluminium
opal glass



..6131

Art.-No.	Lamp	Base	EEI
696131	Wall and Ceiling lamp 2x QA 55 57 W	E27	A++ to E




Wall lamps

with double-sided light output




with LED, lightcolour warmwhite, 3000 K, with integrated converter AC/DC resp. for tungsten halogen lamps QT 14, QT-DE 12, resp. for compact fluorescent lamps TC-D stainless steel with mounting plate made of cast aluminium opal coated plane glass


■ Available on request with one-sided light output.



..6346, ..6146



..6342, ..6142




..6343, ..6143



Art.-No.	Lamp	Luminous flux	EEI
with LED			
696346	2 x LED 5,8 W	each 430 lm	A+
696342	2 x LED 7,8 W	each 580 lm	A+
696343	2 x LED 9,6 W	each 720 lm	A+

Art.-No.	Lamp	Lamp length	Base	EEI
for tungsten halogen lamps				
696146	1 x QT 14 60 W		G9	B to E
696142	1 x QT-DE 12 60 W	74,9 mm	R7s	B to E
for fluorescent lamp				
696143	1 x TC-D 26 W		G24d-3	B



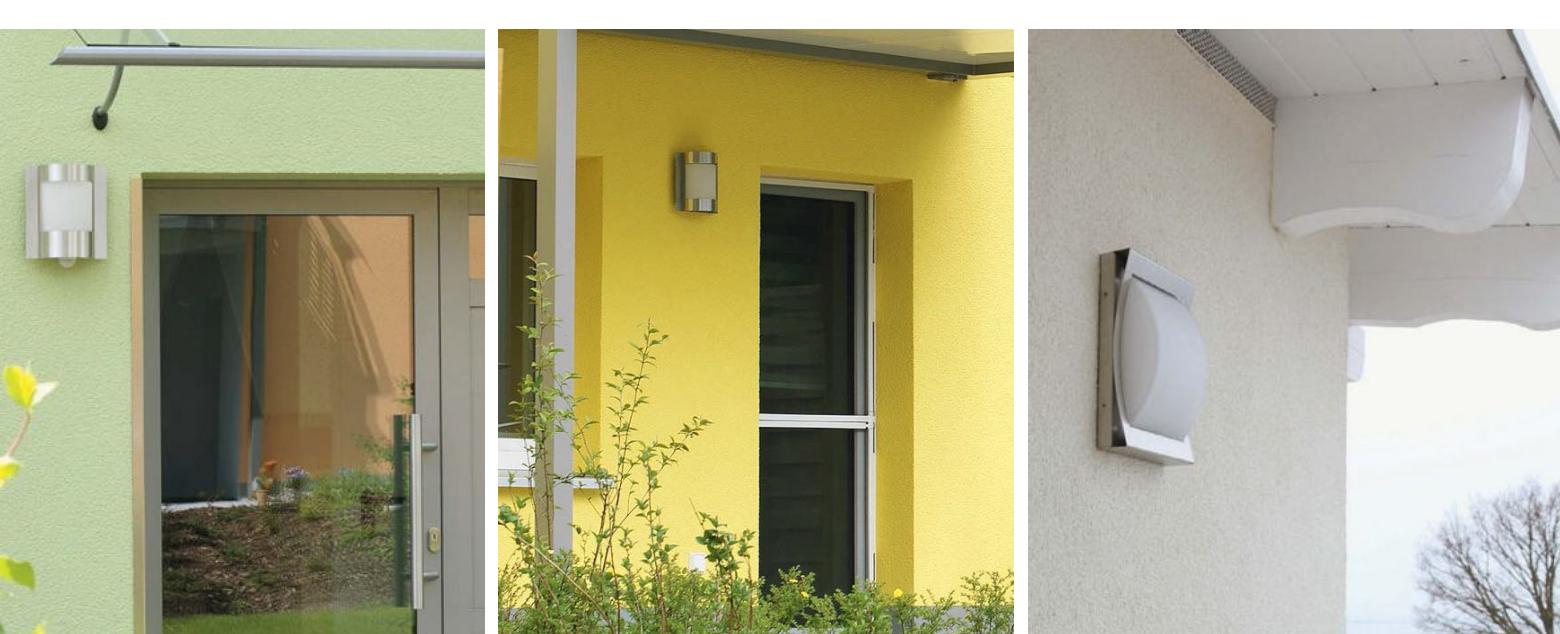


Wall lamps Ceiling lamps




IP44

for incandescent lamps
stainless steel
with mounting plate made of
cast aluminium
opal glass


LED Available on request
with LED 10 W (770 lm,
3000 K, warmwhite) for power
supply 230 V, 50 Hz.



..6188



..6187



..6193

Art.-No.	Lamp	Base	EEI
Wall lamp with movement detector			
696188	1 x QA 55 57 W	E27	A++ to E
Wall lamp			
696187	1 x QA 55 57 W	E27	A++ to E
Wall and Ceiling lamp			
696193	1 x QA 55 57 W	E27	A++ to E




Wall lamps




with LED, lightcolour warmwhite,
3000 K, with integrated
converter AC/DC resp.
for incandescent lamps
stainless steel




with mounting plate made of
cast aluminium
opal glass



..6217



..6282, ..6390



..6283, 6391



Art.-No.	Lamp	Luminous flux	EEI
Wall lamp with LED			
696390	1 x LED 10 W	770 lm	A
Wall lamp with movement detector and LED			
696391	1 x LED 10 W	770 lm	A

Art.-No.	Lamp	Base	EEI
Wall lamps for incandescent lamps			
696217	1 x QA 55 57 W	E27	A++ to E
696282	1 x QA 55 57 W	E27	A++ to E
Wall lamp with movement detector for incandescent lamps			
696283	1 x QA 55 57 W	E27	A++ to E




Wall lamps




IP 44

for incandescent lamps
stainless steel
with mounting plate made of
cast aluminium
opal glass

LED Available on request
with LED 10 W (770 lm,
3000 K, warmwhite) for power
supply 230 V, 50 Hz.



..6101



..6060



Art.-No.	Lamp	Base	EEI
Wall lamp with movement detector			
696101	1 x QA 55 57 W	E27	A++ to E
Wall lamp			
696060	1 x QA 55 57 W	E27	A++ to E

Wall lamps
Ceiling lamps



for incandescent lamps
 stainless steel
 with mounting plate made of
 cast aluminium
 opal glass

IP 44


LED Available on request
 with LED 10 W (770 lm,
 3000 K, warmwhite) for power
 supply 230 V, 50 Hz.

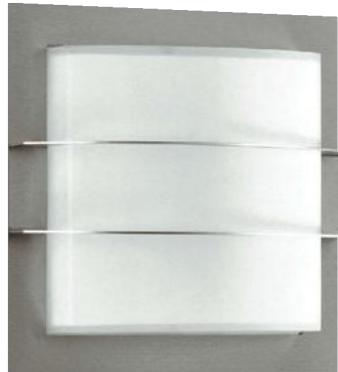


..6191




..6140



..6223

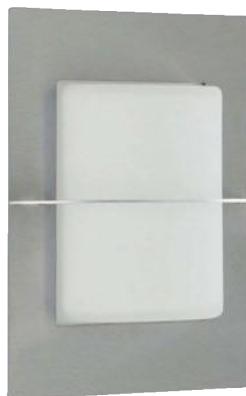

Art.-No.	Lamp	Base	EEI
Wall and Ceiling lamp			
696191	1x QA 55 57 W	E27	A++ to E
Wall lamp with movement detector			
696140	1x QA 55 57 W	E27	A++ to E
Wall lamp			
696223	1x QA 55 57 W	E27	A++ to E




..0204


**Wall lamps
Pedestal lamp
Bollard lamp**

IP 44


for tungsten halogen lamps QT 14
stainless steel
with mounting plate made of
cast aluminium
borosilicate glass



..0205




..0206




..0208



Foto: DPI Paneelen, Wesel





..0557



..2244



Art.-No.	Lamp	Base	EEI
Wall lamps			
690204	1x QT 14 40 W	G9	B to E
690205	1x QT 14 40 W	G9	B to E
691000 appropriate corner plate			
690206	2x QT 14 40 W	G9	B to E
691000	appropriate corner plate		
690208	2x QT 14 40 W	G9	B to E
691000	appropriate corner plate		
Pedestal lamp			
690557	1x QT 14 40 W	G9	B to E
690010	appropriate sunk pedestal		
Bollard lamp			
692244	1x QT 14 40 W	G9	B to E
690010	appropriate sunk pedestal		

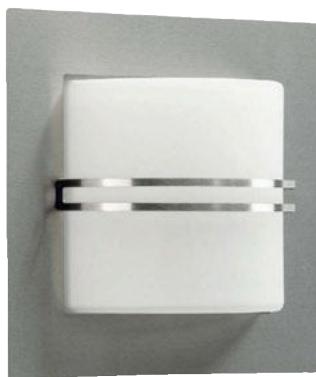**Wall lamp**

..6058

for incandescent lamps
stainless steel
with mounting plate made of
cast aluminium
opal glass


LED Available on request
with LED 10 W (770 lm,
3000 K, warmwhite) for power
supply 230 V, 50 Hz.

Art.-No.	Lamp	Base	EEI
696058	Wall lamp	1x QA 55 57 W E27	A++ to E


**Wall lamps**

for incandescent lamps
stainless steel
with mounting plate made of
cast aluminium
opal glass


LED Available on request
with LED 10 W (770 lm,
3000 K, warmwhite) for power
supply 230 V, 50 Hz.



..6109



..6144



..6224



Art.-No.	Lamp	Base	EEI
696109	Wall lamp	1x QA 55 57 W E27	A++ to E
696144	Wall lamp with movement detector	1x QA 55 57 W E27	A++ to E
696224	Wall lamp	1x QA 55 57 W E27	A++ to E



Wall lamps
Pedestal lamp
Bollard lamp






IP44


for energy saving lamps (ESL)
 TC-DSE resp. LED-Retrofit
 stainless steel
 with mounting plate made of
 cast aluminium
 opal glass

■ Recommended distance:
 Pedestal and Bollard lamp 6 m

■ Advice:
 For use with these lamps we
 recommend the LED-Retrofit,
 see p. 217, Art.-No. 90750309.

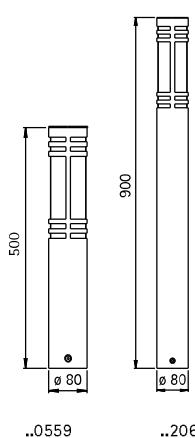

Art.-No.	Lamp	Lamp dimensions	Base	EEI
690251	Wall lamp	1 x ESL / LED-Retrofit max. 20 W	max. ø 55 x 250 mm	E27
690258	Wall lamp	1 x ESL / LED-Retrofit max. 20 W	max. ø 55 x 250 mm	E27
691000		appropriate corner plate		
690559	Pedestal lamp	1 x ESL / LED-Retrofit max. 20 W	max. ø 55 x 250 mm	E27
690010		appropriate sunk pedestal		
692068	Bollard lamp	1 x ESL / LED-Retrofit max. 20 W	max. ø 55 x 250 mm	E27
690010		appropriate sunk pedestal		

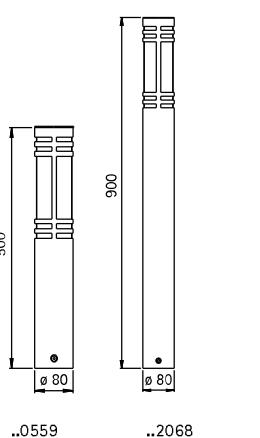




**Wall lamps
Ceiling lamps**




IP 44

for incandescent lamps
stainless steel
with mounting plate made of
cast aluminium
opal glass

LED Available on request
with LED 10 W (770 lm,
3000 K, warmwhite) for power
supply 230 V, 50 Hz.



..6280



..6281

Art.-No.	Lamp	Base	EEI
Wall and Ceiling lamps			
696280	1 x QA 55 57 W	E27	A++ to E
696281	1 x QA 55 57 W	E27	A++ to E




**Wall lamp
Pedestal lamp
Bollard lamp**



for energy saving lamps (ESL)
TC-DSE resp. LED-Retrofit
stainless steel
with mounting plate made of
cast aluminium
acrylic glass matted

■ Recommended distance:
Pedestal and Bollard lamp 6 m

■ Advice:
For use with these lamps we
recommend the LED-Retrofit,
see p. 217, Art.-No. 90750309.

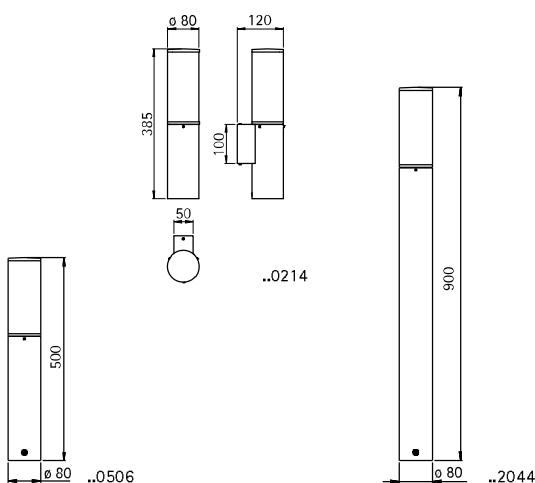

Art.-No.	Lamp	Lamp dimensions	Base	EEI
690214	Wall lamp	1 x ESL / LED-Retrofit max. 20 W	max. ø 55 x 250 mm	E27
691000		appropriate corner plate		A++ to B
<hr/>				
690506	Pedestal lamp	1 x ESL / LED-Retrofit max. 20 W	max. ø 55 x 250 mm	E27
690010		appropriate sunk pedestal		A++ to B
<hr/>				
692044	Bollard lamp	1 x ESL / LED-Retrofit max. 20 W	max. ø 55 x 250 mm	E27
690010		appropriate sunk pedestal		A++ to B





Wall lamps
Pedestal lamp
Bollard lamps





IP 44

for energy saving lamps (ESL)
TC-DSE resp. LED-Retrofit
resp. for additional pressed glass
reflector lamp PAR 16
stainless steel
with mounting plate
acrylic and opal glass

■ Recommended distance:
Pedestal and Bollard lamp 6 m

■ Advice:
For use with these lamps we recommend the LED-Retrofit,
see p. 217, Art.-No. 90750309.

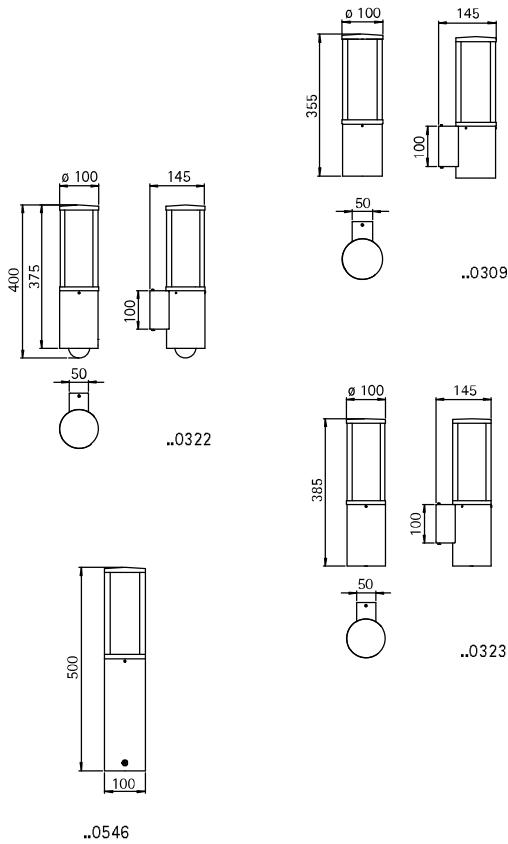

..2272

Art.-No.	Lamp	Lamp dimensions	Base	EEI
Wall lamp				
690309	1 x ESL / LED-Retrofit max. 20 W	max. Ø 50 x 250 mm	E27	A++ to B
691000	appropriate corner plate			
Wall lamp with movement detector				
690322	1 x ESL / LED-Retrofit max. 20 W	max. Ø 50 x 250 mm	E27	A++ to B
691000	appropriate corner plate			
Wall lamp with additional downlight PAR 16				
690323	1 x ESL / LED-Retrofit max. 20 W	max. Ø 50 x 250 mm	E27	A++ to B
	1 x PAR 16 50 W	max. Ø 50 x 56 mm	GU10	A++ to E
691000	appropriate corner plate			
Pedestal lamp				
690546	1 x ESL / LED-Retrofit max. 20 W	max. Ø 50 x 250 mm	E27	A++ to B
690010	appropriate sunk pedestal			
Bollard lamp				
692272	1 x ESL / LED-Retrofit max. 20 W	max. Ø 50 x 250 mm	E27	A++ to B
690010	appropriate sunk pedestal			
Bollard lamp with movement detector (not illustrated)				
692071	1 x ESL / LED-Retrofit max. 20 W	max. Ø 50 x 250 mm	E27	A++ to B
690010	appropriate sunk pedestal			






**Wall lamp
Pedestal lamp
Bollard lamp**



for energy saving lamps (ESL) resp.
LED-Retrofit resp. fluorescent lamps TC-L
with electronic ballast
stainless steel
with mounting plate made of
cast aluminium
acrylic glass opal

■ Recommended distance:
Pedestal and Bollard lamp 6 m

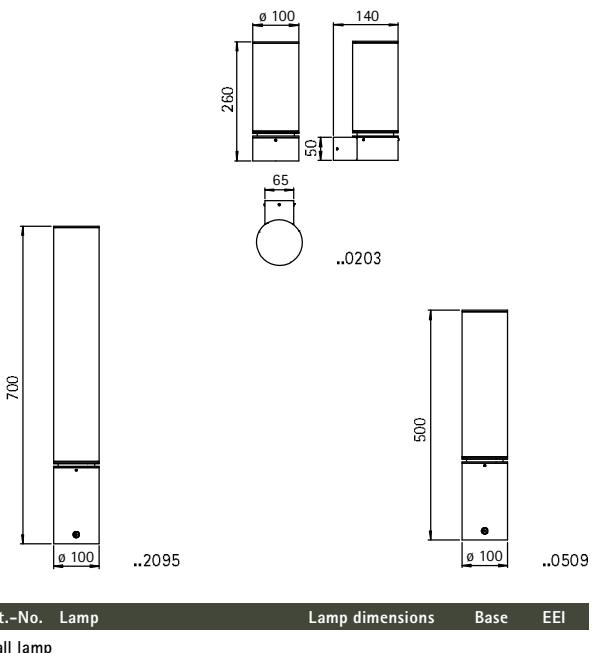

Art.-No.	Lamp	Lamp dimensions	Base	EEI
Wall lamp				
690203	1 x ESL / LED-Retrofit max. 20 W	max. ø 55 x 250 mm	E27	B
Pedestal lamp				
690509	1 x TC-L 24 W		2G11	B
690010	appropriate sunk pedestal			
Bollard lamp				
692095	1 x TC-L 36 W		2G11	A
690010	appropriate sunk pedestal			




**Wall, Ceiling and
Pedestal lamp**
Bollard lamp
Lamp with spike




IP 44

for energy saving lamps (ESL) resp.
LED-Retrofit
stainless steel
with mounting plate made of
cast aluminium resp.
spike with 2,5 m cable and plug
acrylic glass opal


- Recommended distance:
Pedestal and Bollard lamp 6 m




..0201



..2127



..0560



..2098



Art.-No.	Lamp	Lamp dimensions	Base	EEI
Wall, Ceiling and Pedestal lamp				
690201	1 x ESL / LED-Retrofit max. 15 W	max. Ø 55 x 110 mm	E27	A++ to B
Pedestal lamp				
690560	1 x ESL / LED-Retrofit max. 15 W	max. Ø 55 x 110 mm	E27	A++ to B
690010	appropriate sunk pedestal			
Bollard lamp				
692098	1 x ESL / LED-Retrofit max. 15 W	max. Ø 55 x 110 mm	E27	A++ to B
690010	appropriate sunk pedestal			
Lamp with spike				
692127	1 x ESL / LED-Retrofit max. 15 W	max. Ø 55 x 110 mm	E27	A++ to B




**Wall lamps
Ceiling lamps**




IP44

with LED, lightcolour warmwhite,
3000 K, with integrated
converter AC/DC
stainless steel
with mounting plate
opal glass



..6408



..6407

Art.-No.	Lamp	Luminous flux	EEI
Wall and Ceiling lamps			
696408	1x LED 10 W	770 lm	A+
696407	1x LED 10 W	770 lm	A+




Wall lamp
Bollard lamp

for incandescent lamps
stainless steel
with mounting plate
opal glass




IP 44

- Recommended distance:
Bollard lamp 4 m



..0601

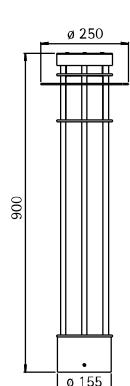

..2226



Art.-No.	Lamp	Base	EEI
Wall lamp			
690601	1x QA 55 57 W	E27	A++ to E
691004	appropriate corner plate		
Bollard lamp			
692226	1x QA 55 57 W	E27	A++ to E
690010	appropriate sunk pedestal		




Wall lamps




IP 44

for incandescent lamps
stainless steel
with mounting plate made of
cast aluminium
opal glass

LED Available on request
with LED 10 W (770 lm,
3000 K, warmwhite) for power
supply 230 V, 50 Hz.




..6278



..6178

Art.-No.	Lamp	Base	EEI
Wall lamp with movement detector			
696278	1 x QA 55 57 W	E27	A++ to E
Wall lamp			
696178	1 x QA 55 57 W	E27	A++ to E

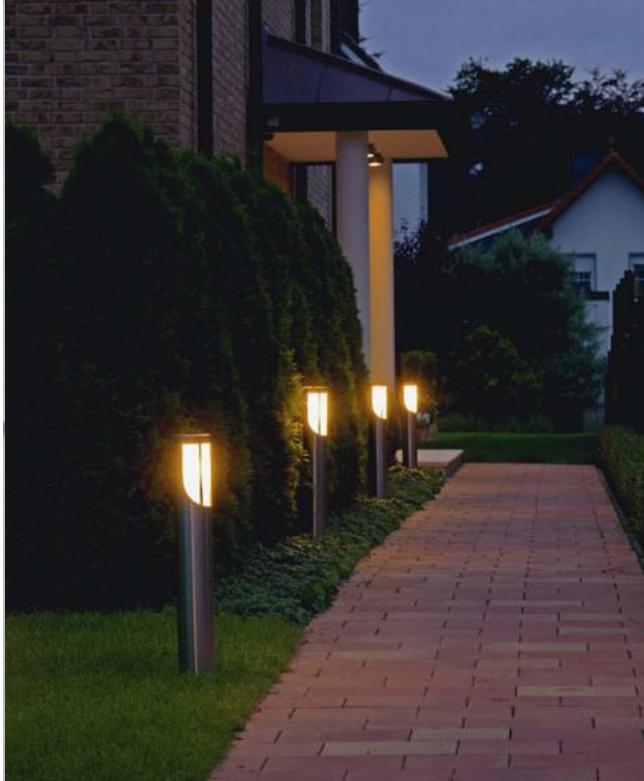





**Wall lamps
Bollard lamps**



IP 44

for incandescent lamps
stainless steel
with mounting plate
opal glass

■ Recommended distance:
Bollard lamp 6 m

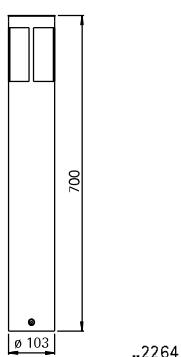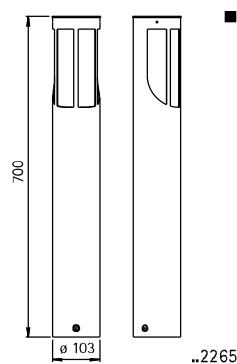

Art.-No.	Lamp	Base	EEI
Wall lamp			
690256	1x QA 55 57 W	E27	A++ to E
691000	appropriate corner plate		
Bollard lamp			
692265	1x QA 55 57 W	E27	A++ to E
690010	appropriate sunk pedestal		
Wall lamp			
690324	1x QA 55 57 W	E27	A++ to E
691000	appropriate corner plate		
Bollard lamp			
692264	1x QA 55 57 W	E27	A++ to E
690010	appropriate sunk pedestal		


Wall lamps

IP 44




for incandescent lamps
stainless steel
with mounting plate made of
cast aluminium
opal glass

LED Available on request
with LED 10 W (770 lm,
3000 K, warmwhite) for power
supply 230 V, 50 Hz.



..6141



..6119

Art.-No.	Lamp	Base	EEI
Wall lamp with movement detector			
696141	1x QA 55 57 W	E27	A++ to E
Wall lamp			
696119	1x QA 55 57 W	E27	A++ to E




Wall lamps
Pedestal lamp
Bollard lamps




IP 44

for incandescent lamps resp. for additional pressed glass reflector lamp PAR 20
stainless steel
with mounting plate made of cast aluminium (only ..0505, ..2246, ..2011)
opal glass


■ Recommended distance:
Pedestal and Bollard lamp 6 m



..0243




..0239



..0241



..0505



..2246



Art.-No.	Lamp	Base	Lamp dimensions	EEI
690003	Wall lamp			A++ to E
690243	1x QA 55 57 W E27			A++ to E
<hr/>				
690003	appropriate corner plate			
<hr/>				
690243	Wall lamp with additional downlight PAR 20 50 W			A++ to E
690003	1x QA 55 57 W E27			A++ to E
690003	PAR 20 50 W E27		max. ø 64 x 90 mm	A++ to E
<hr/>				
690003	appropriate corner plate			
<hr/>				
690241	Wall lamp with movement detector			A++ to E
690003	1x QA 55 57 W E27			A++ to E
690003	appropriate corner plate			
<hr/>				
690505	Pedestal lamp			A++ to E
690010	1x QA 55 57 W E27			A++ to E
690010	appropriate sunk pedestal			
<hr/>				
692246	Bollard lamp			A++ to E
690010	1x QA 55 57 W E27			A++ to E
690010	appropriate sunk pedestal			
<hr/>				
692011	Bollard lamp with movement detector (not illustrated)			A++ to E
690010	1x QA 55 57 W E27			A++ to E
690010	appropriate sunk pedestal			





**Wall lamp
Ceiling lamp**



IP44

for incandescent lamps
stainless steel
with mounting plate made of
cast aluminium
opal glass

LED Available on request
with LED 10 W (770 lm,
3000 K, warmwhite) for power
supply 230 V, 50 Hz.

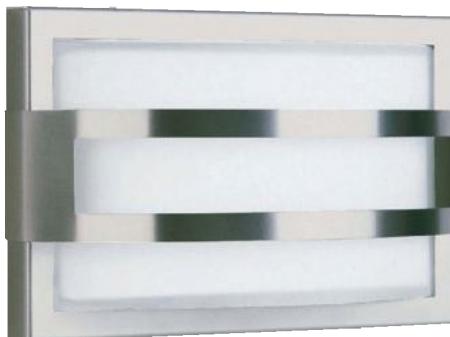

..6180

Art.-No.	Lamp	Base	EEI
696180	1 x QA 55 57 W	E27	A++ to E




Wall lamp
Pedestal lamp
Bollard lamp


for fluorescent lamps TC-D
stainless steel
with mounting plate (except ..0627)
acrylic-hollow glass

IP44


■ Recommended distance:
Pedestal and Bollard lamp 4 m



..0627



..2213






..0550




Art.-No.	Lamp	Base	EEI
Wall lamp			
690627	1x TC-D 18 W	G24d-2	B
691003	appropriate corner plate		
Pedestal lamp			
690550	1x TC-D 18 W	G24d-2	B
690010	appropriate sunk pedestal		
Bollard lamp			
692213	1x TC-D 18 W	G24d-2	B
690010	appropriate sunk pedestal		



Foto: DPI Paneele, Wesel

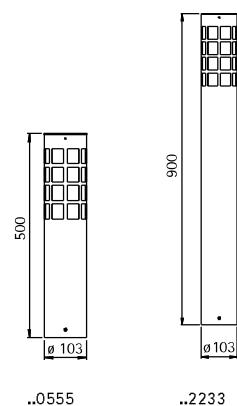

**Wall lamps
Pedestal lamp
Bollard lamp**



for incandescent lamps
stainless steel
with mounting plate made of
cast aluminium
opal glass


LED Available on request
with LED 10 W (770 lm,
3000 K, warmwhite) for power
supply 230 V, 50 Hz.

■ Recommended distance:
Pedestal and Bollard lamp 6 m


Art.-No.	Lamp	Base	EEI
Wall lamp with movement detector			
690209	1x QA 55 57 W	E27	A++ to E
Wall lamp			
690691	1x QA 55 57 W	E27	A++ to E
Pedestal lamp			
690555	1x QA 55 57 W	E27	A++ to E
690010	appropriate sunk pedestal		
Bollard lamp			
692233	1x QA 55 57 W	E27	A++ to E
690010	appropriate sunk pedestal		

Wall lamps

with LED, lightcolour warmwhite,
3000 K, dimmable resp. for
fluorescent lamps TC-S resp.
tungsten halogen lamps QT 14
stainless steel
with mounting plate made of
cast aluminium
690635, 690636 acrylic-hollow
glass
690252 borosilicate glass



..0252



..0635, ..0636

Art.-No.	Lamp	Luminous flux	EEI
with LED			
690636	1 x LED 16 W	1600 lm	A+
Art.-No. Lamp Base EEI			
for fluorescent lamp			
690635	1 x TC-S 11 W	G23	A
for tungsten halogen lamps			
690252	2 x QT 14 40 W	G9	B to E






**Wall lamp
Pedestal lamp
Bollard lamp**




IP44

for incandescent lamps
stainless steel
with mounting plate
opal glass


■ Recommended distance:
Pedestal and Bollard lamp 4 m



..0216




..2256



..0500

Art.-No.	Lamp	Base	EEI
Wall lamp			
690216	1x QA 55 57 W	E27	A++ to E
691004	appropriate corner plate		
Pedestal lamp			
690500	1x QA 55 57 W	E27	A++ to E
690010	appropriate sunk pedestal		
Bollard lamp			
692256	1x QA 55 57 W	E27	A++ to E
690010	appropriate sunk pedestal		

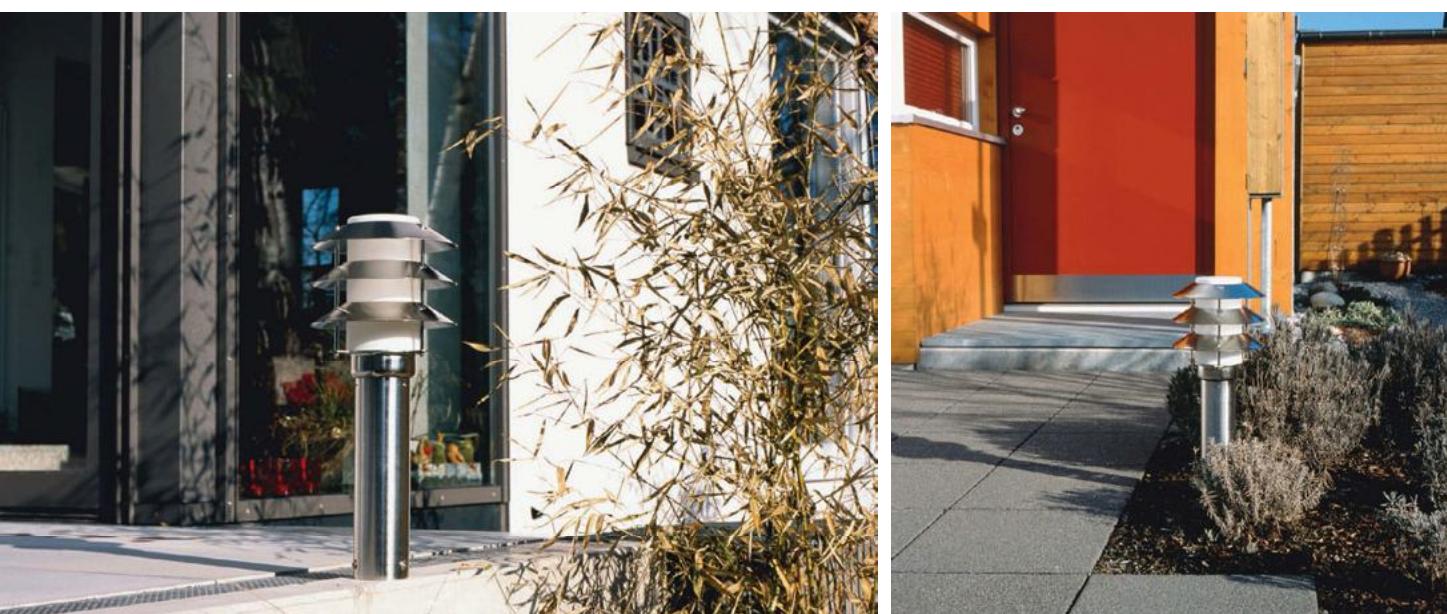




Wall lamps
Bollard lamp

for incandescent lamps
stainless steel with mounting
plate (except ..0238)
opal glass

■ Recommended distance:
Bollard lamp 4 m



IP44

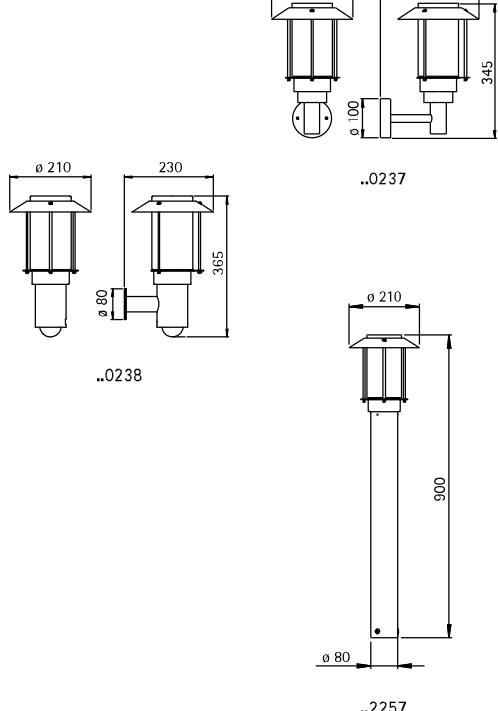

Art.-No.	Lamp	Base	EEI
Wall lamp			
690237	1x QA 55 57 W	E27	A++ to E
691004	appropriate corner plate		
Wall lamp with movement detector			
690238	1x QA 55 57 W	E27	A++ to E
691003	appropriate corner plate		
Bollard lamp			
692257	1x QA 55 57 W	E27	A++ to E
690010	appropriate sunk pedestal		





Wall lamps




IP44

for incandescent lamps
stainless steel
with mounting plate made of
cast aluminium
opal glass

LED Available on request
with LED 10 W (770 lm,
3000 K, warmwhite) for power
supply 230 V, 50 Hz.

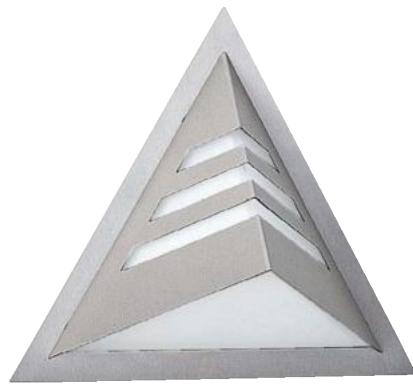

..6124



..6123

Art.-No.	Lamp	Base	EEI
696124	1x QA 55 57 W	E27	A++ to E
696123	1x QA 55 57 W	E27	A++ to E



Wall lamp



IP 44

for incandescent lamps

stainless steel


with mounting plate made of

cast aluminium

opal glass

LED

Available on request with
LED 10 W (770 lm,
3000 K, warmwhite)
for power supply 230 V, 50 Hz.




Art.-No.	Lamp	Base	EEI
690220	1x QA 55 57 W	E27	A++ to E

Wall lamp Bollard lamp


Protection class IP 44
for tungsten halogen lamps QT 14
stainless steel
with mounting plate made of
cast aluminium
opal coated plane glass

- Recommended distance:
Bollard lamp 3 m

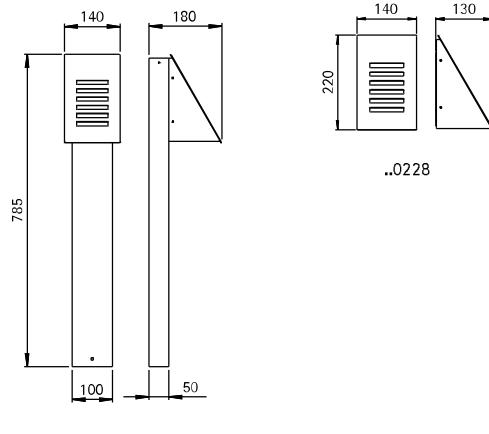


..0228





**Wall lamps**

for incandescent lamps
stainless steel
opal glass



..6127

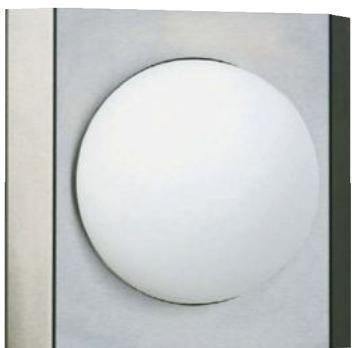


..6112

Art.-No.	Lamp	Base	EEI
Wall lamp with movement detector			
696127	1x QA 55 57 W	E27	A++ to E
Wall lamp			
696112	1x QA 55 57 W	E27	A++ to E

**Wall lamp
Ceiling lamp**

for incandescent lamps
stainless steel
with mounting plate made of
cast aluminium
opal glass




..6175

LED Available on
request with
LED 10 W (770 lm,
3000 K, warmwhite)
for power supply 230
V, 50 Hz.

Art.-No.	Lamp	Base	EEI
Wall and Ceiling lamp			
696175	1x QA 55 57 W	E27	A++ to E

**Wall lamps
Ceiling lamps**


with LED, lightcolour warmwhite,
3000 K, with integrated
converter AC/DC resp.
for incandescent lamps
made of stainless steel
with mounting plate
opal glass




..6286, ..6386

Art.-No.	Lamp	Luminous flux	EEI
with LED			
696386	1 x LED 10 W	770 lm	A

Art.-No.	Lamp	Base	EEI
for incandescent lamp			
696286	1 x QA 55 57 W	E27	A++ to E

**Wall lamp
Ceiling lamp**


with LED, lightcolour warmwhite,
3000 K, dimmable resp.
for incandescent lamps
made of stainless steel
with mounting plate
acrylic glass opal




..6356

Art.-No.	Lamp	Luminous flux	EEI
with LED			
696356	1 x LED 16 W	1600 lm	A

**Wall lamp
Ceiling lamp**


for incandescent lamps
stainless steel
with mounting plate made of
cast aluminium
opal glass



..6174

LED Available on
request with
LED 10 W (770 lm,
3000 K, warmwhite)
for power supply 230
V, 50 Hz.

Art.-No.	Lamp	Base	EEI
for incandescent lamp			
696174	1 x QA 55 57 W	E27	A++ to E



**House number
lamps**


with LED, lightcolour warmwhite,
3000 K, dimmable

made of stainless steel
with mounting plate
acrylic glass opal


Lettering height: 95 mm

IP44

■ For the order please mention the
house number.



..6015



..6016

Art.-No.	Lamp	Luminous flux	EEI
696015	1x LED 8 W	900 lm	A+
696016	1x LED 8 W	900 lm	A+


**House number
lamps**

IP44


for fluorescent lamps TC-S
stainless steel
custom-made house number
with mounting plate made of
cast aluminium
opal glass
.6003 with twilight switch

LED Available on
request with
LED 10 W (770 lm,
3000 K, warmwhite)
for power supply 230
V, 50 Hz.


■ For the order please mention
the house number.



..6017



..6002





..6003



Art.-No.	Lamp	Base	EEI
Wall lamps			
696017	1 x TC-S 5/7 W	G23	A
696002	1 x TC-S 5/7 W	G23	A
Wall lamp with twilight switch			
696003	1 x TC-S 5/7 W	G23	A






..6000

House number lamps


LED **IP44**

with LED, lightcolour white,
3000 K
including converter
direct connection 230 V, 50 Hz
stainless steel
customized laser-made
Lettering height: 100 mm

■ For the order please mention the house number.



..6008



..6009

Art.-No.	Lamp	EEI
696000	1x LED 1,0 W	A+
696008	1x LED 1,2 W	A+
696009	1x LED 1,5 W	A+





Recessed wall lamps

for fluorescent lamps TC-D
cast aluminium and stainless steel
makrolon white
insert hole:

691906: 180 x 86 x 100 mm



691907: 260 x 86 x 100 mm



IP54

..1906

Art.-No.	Lamp	Base	EEI
691906	1x TC-D 10 / 13 W	G24d-1	A
691907	1x TC-D 18 W	G24d-2	B

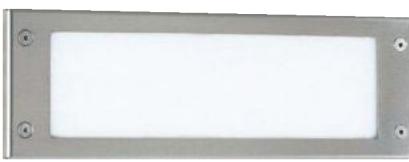

..1907